INNO-FIT™ SRK

SEMIRIGID KYNAR™ TUBING
UL REC. 600 V, 150˚C (VW-1)

Description

The Innovative Power Products INNO-FIT type SRK tubing is a semirigid, thin wall, highly flame-retarded, heatshrinkable Kynar™ tubing recognized by Underwriters' Laboratories (UL) Subject 224 as a VW-1 rated material. It has excellent cut-through and solvent resistance properties. The shrink temperature is 175˚C with an indefinite storage life. This tubing is ideal for strain relieving or protecting components in high temperature environments. It is an excellent tubing where maximum abrasion or cut-through resistance or solvent resistance is desired.

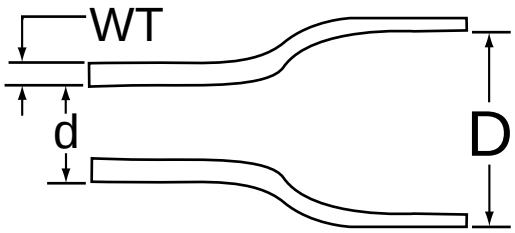

Illustration is not to scale

- **Flame Retarded UL-224 (VW-1)**
- **Available in Clear Only**
- **Cut-through and Abrasion Resistant**
- **Excellent Solvent Resistance**
- **Lightweight, Thin Walled**
- **Indefinite Shelf Life**
- **175˚C Shrink Temperature**
- **-55˚C to +175˚C Operating Range**
- **UL Recognized 600 Volt, 150˚C**

Selection and Ordering Information

Find the diameter required for the application. Always select the largest tubing size that will shrink down on the smallest diameter. Example: for a box of clear tubing to insulate a bundle of wires with a combined outside diameter of 0.65 inches, the tubing selection will be: Tubing Type Size* Packaging [box(-B)]

INNO-FIT SRK **- 1** -B

Wire Range	Tubing Size*	Inside Diameter As Supplied D	Inside Diameter After Recovery d	Wall Thickness Post Recovery WT	Standard Box 4 foot lengths	Standard Spool length
None	**3/64**	.046 *(1.2 mm)*	.023 *(0.6 mm)*	.010 *(0.25 mm)*	250 pcs.	Not available
None	**1/16**	.063 *(1.6 mm)*	.031 *(0.8 mm)*	.010 *(0.25 mm)*	250 pcs.	Not available
22-20	**3/32**	.093 *(2.4 mm)*	.046 *(1.2mm)*	.010 *(0.25 mm)*	250 pcs.	Not available
18-16	**1/8**	.125 *(3.2 mm)*	.062 *(1.6 mm)*	.010 *(0.25 mm)*	250 pcs.	Not available
14-10	**3/16**	.187 *(4.8 mm)*	.093 *(2.4 mm)*	.010 *(0.25 mm)*	50 pcs.	Not available
10-8	**1/4**	.250 *(6.4 mm)*	.125 *(3.2 mm)*	.012 *(0.30 mm)*	50 pcs.	Not available
6-4	**3/8**	.375 *(9.5 mm)*	.187 *(4.80mm)*	.012 *(0.30 mm)*	50 pcs.	Not available
3-1	**1/2**	.500 *(12.7 mm)*	.250 *(6.4 mm)*	.012 *(0.30 mm)*	25 pcs	Not available
1-3/0	**3/4**	.750 *(19.1 mm)*	.375 *(9.50mm)*	.017 *(0.43 mm)*	25 pcs.	Not available
4/0-750	**1**	1.00 *(25.4 mm)*	.500 *(12.7 mm)*	.019 *(0.48 mm)*	15 pcs.	Not available
1000-1250	**1-1/2**	1.50 *(38.1 mm)*	.750 *(19.1 mm)*	.020 *(0.51 mm)*	15 pcs.	Not available
1500-2500	**2**	2.00 *(50.8 mm)*	1.00 *(25.4 mm)*	.020 *(0.51 mm)*	15 pcs.	Not available

Related Product Information

INNOFIT Type SRK: • Price List PL-220