



# MVJT 080T SERIES

## 8 kV Medium Voltage Trifurcating Joint

Three-core to three, single-core 7.2-11 kV, extruded dielectric shielded power cables

### Description

The Innovative Power Products MVJT 080T series joint is a heatshrinkable system for jointing *shielded* three-core 8 kV (7.2-11 kV) extruded dielectric medium voltage cable to three, single-core extruded dielectric power cables. The kit has a heatshrinkable cable breakout boot and jacketing tubings to convert the three-core cable into three, single-core cables. After converting the three-core cable, the MVJ 080T kits are installed to complete the trifurcation. The joint can be installed on three-core armored and unarmored cables.

MVJT 080T kits provide a lightweight, compact and environmentally sealed system for splicing extruded dielectric shielded power cable. These features allow the installation of this jointing system in duct systems, vaults, submersible or direct-buried applications. This system provides a total environmental seal; joint failures in flooded vaults are eliminated.

### Related Product Information

MVJT 080T series: • Price List PL-626


### Versatility

MVJT 080T kits cover a wide range of conductor sizes and shapes. It will accommodate out-of-round or off-tolerance cables, in both round and sector shaped conductor. The standard kit fits all cable constructions including: metallic tape, drain wire shielded or Unishield® power cable. The MVJT kits can be used for size transitions within the actual kit's cable use range. Four (4) kit sizes cover all cable sizes from 6 AWG through 1000 kcmil. When preparing the cable ends, no pencilling of the cable insulation is required.

### Performance


MVJT 080T kits are factory engineered to provide fast and easy installations with reliable performance.

All MVJT kits are designed to meet or exceed the requirements of the applicable sections of the following cable and cable accessory standards: IEEE-404, IEEE-48, ICEA-66-524, ICEA-66-516, and ANSI C119.2.

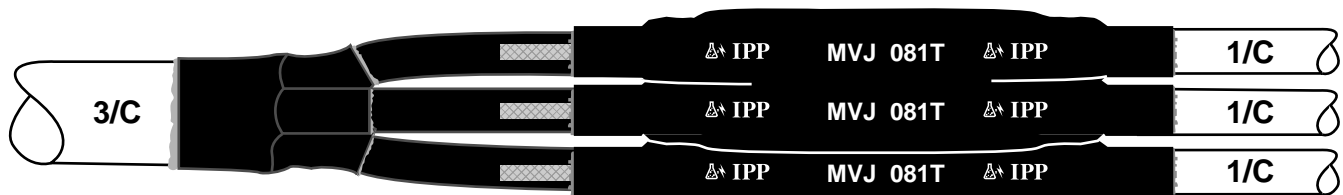

### Convenient Packaging

Each MVJ factory engineered kit is an individually packaged single-core *shielded* cable joint. Everything is included to splice three single-core cables *less* the butt-splice connector and external grounding components. External grounding components can be included as a kit option. Connectors can be supplied in the kits; subject to factory quote. See section 5 for connector information.

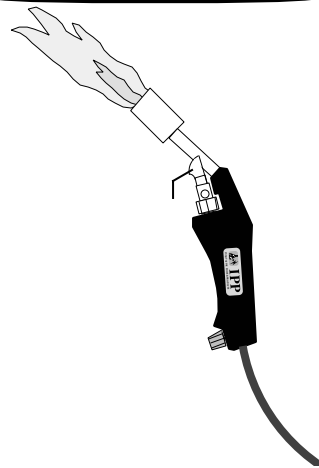


## ELECTRICAL SPECIFICATIONS: 8 kV Rated Trifurcating Joints

Test Requirement	Value	MVJT 080T
AC withstand, 1 minute (60 hz)	23 kV	PASS
DC withstand, 15 minutes	45 kV	PASS
Partial Discharge (Corona) Voltage <3pC	6.9 kV	> 6.9 kV
Impulse withstand 1.2 x 50 $\mu$ s (crest kV)	95 kV	> 95 kV
AC withstand, 1 hour (60 hz)	34.5 kV	PASS
AC withstand, 5 hours (60 hz)	23 kV	PASS
Continuous current rating	= cable	= cable
Cyclical submersion test (ANSI C119.2)	Pass 52 cycles	Passed 52 cycles

## BILL OF MATERIALS (Std. Pkg: 1 kit = 1 each, 3/C to 3-1/C joint)

Key	Item Description	Quantity	Supplied	Key	Item Description	Quantity	Supplied
①	Cable Breakout Boot	1 per kit	in all kits	⑤	Sealed Grounding Kit	3 per kit	Gmod (if spec'd)
②	Ground Jacketing Tube	3 per kit	in all kits	•	Cable cleaning kit	3 per kit	P mod (if spec'd)
③	Core Jacketing Tube	3 per kit	in all kits	•	Butt-splice Connector*	1 per kit	Factory quoted
④	MVJ 080T series Kit Black Jacketing Tube	3 per kit	in all kits	•	Installation Guide	1 per kit	in all kits

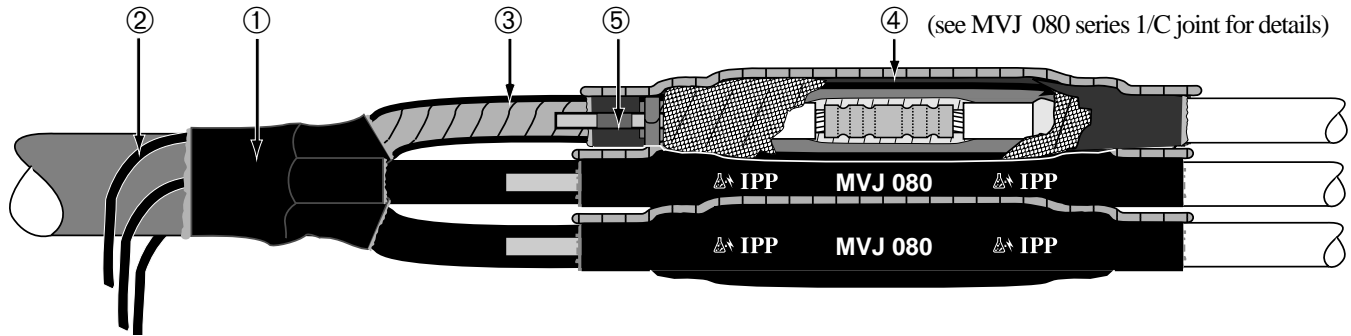

## 8 kV SELECTION GUIDE

Conductor Range <i>All dimensions in inches</i>	Kit Catalog Number	Insulation min.	Diameter max.	Connector Length max.	Connector O.D. max.	Installed Length min.	Installed Length max.
6-2 AWG	MVJT 081T	0.35	0.65	3.00	0.55	28.0	68.0
1-4/0 AWG	MVJT 082T	0.55	0.91	4.25	0.85	30.0	70.0
250-350 kcmil	MVJT 083T	0.80	1.25	6.00	1.20	34.0	72.0
500-1000 kcmil	MVJT 084T	0.98	1.60	8.00	1.60	36.0	78.0

## ORDERING INFORMATION

- Find your cable size in the selection guide above and identify the kit catalog number. This kit will be all that is needed to splice one three-core cable to three single-core cables *less* the connectors and shield grounding kits. **Confirm the dimensional data at the extremes of the size range.**
- Add the *mod kit* letter designation as needed to change the base kit :
  - G** - solderless sealed grounding kit (Gmod).
  - P** - cable cleaning kit including; solvent saturated towels and non-conductive abrasive cloth (Pmod).

### EXAMPLES:

For a 3/C (armored or unarmored), 8 kV, 2 AWG, cable spliced to a 3-1/C, 8 kV, 2 AWG, cables with a solderless grounding kit (G mod): **MVJT 081T G**

For a 3/C, 4/0 AWG, copper conductor 8 kV cable spliced to 3-1/C, 300 kcmil, copper conductor, 8 kV cable with a cable cleaning kit: **MVJT 083T P**

\* **CONNECTORS:** To have connectors supplied in the kits, please refer to [Section 5](#) in this catalog for connector selection information. The connectors must be ordered separately but can be packaged within the kits if detailed information is supplied.