



MVJT 150T SERIES

15 kV Medium Voltage Trifurcating Joint
Three-core to three, single-core 12-17.5 kV,
extruded dielectric shielded power cables

Description

The Innovative Power Products MVJT 150T series joint is a heatshrinkable system for jointing *shielded* three-core 15 kV (12-17.5 kV) extruded dielectric medium voltage cable to three, single-core extruded dielectric power cables. The kit has a heatshrinkable cable breakout boot and jacketing tubings to convert the three-core cable into three, single-core cables. After converting the three-core cable, the MVJ 150T kits are installed to complete the trifurcation. The joint can be installed on three-core armored and unarmored cables.

MVJT 150T kits provide a lightweight, compact and environmentally sealed system for splicing extruded dielectric, shielded power cable. These features allow the installation of this jointing system in duct systems, vaults, submersible or direct-buried applications. This system provides a total environmental seal; joint failures in flooded vaults are eliminated.

Related Product Information

MVJT 150T series: • Price List PL-638


Versatility

MVJT 150T kits cover a wide range of conductor sizes and shapes. It will accommodate out-of-round or off-tolerance cables, in both round and sector shaped conductor. The standard kit fits all cable constructions including: metallic tape, drain wire shielded or Unishield® power cable. The MVJT kits can be used for size transitions within the actual kit's cable use range. Four (4) kit sizes cover all cable sizes from 4 AWG through 1000 kcmil. When preparing the cable ends, no penciling of the cable insulation is required.

Performance

MVJT 150T kits are factory engineered to provide fast and easy installations with reliable performance.

All MVJT kits are designed to meet or exceed the requirements of the applicable sections of the following cable and cable accessory standards: IEEE-404, IEEE-48, ICEA-66-524, ICEA-66-516, and ANSI C119.2.

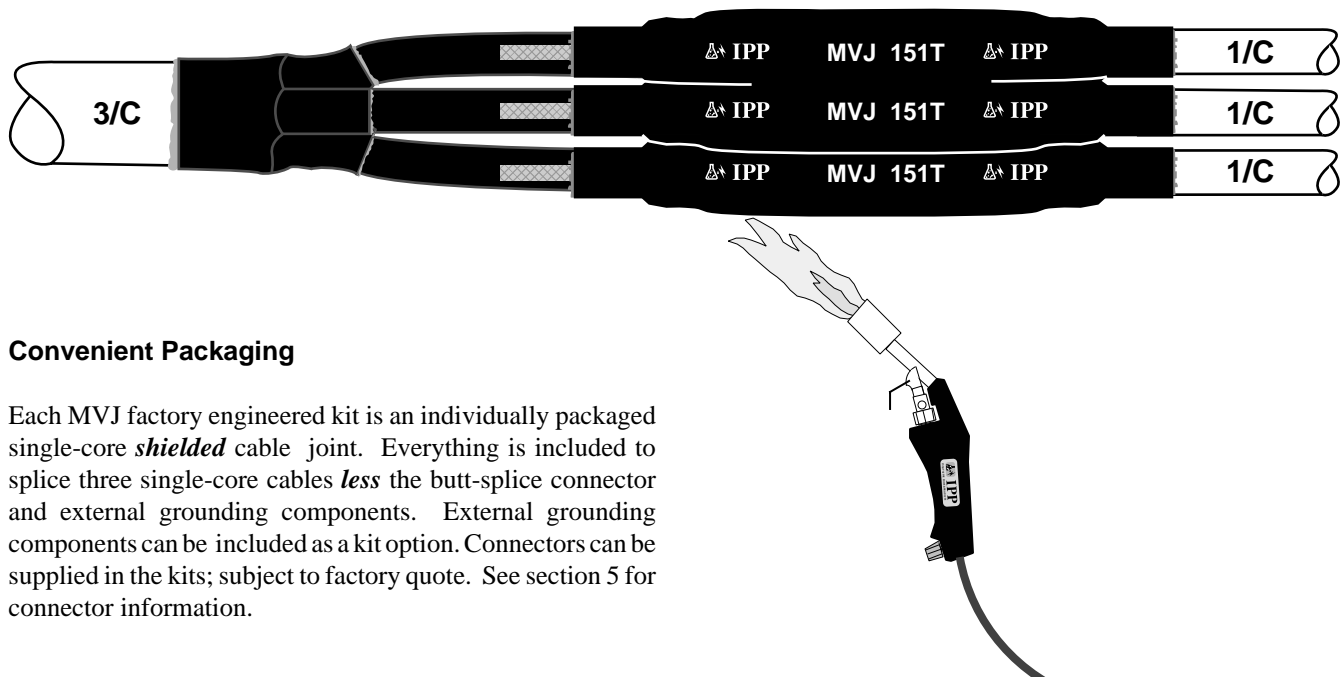

Convenient Packaging


Each MVJ factory engineered kit is an individually packaged single-core *shielded* cable joint. Everything is included to splice three single-core cables *less* the butt-splice connector and external grounding components. External grounding components can be included as a kit option. Connectors can be supplied in the kits; subject to factory quote. See section 5 for connector information.

ELECTRICAL SPECIFICATIONS: 15 kV Rated Trifurcating Joints

Test Requirement	Value	MVJT 150T
AC withstand, 1 minute (60 hz)	35 kV	PASS
DC withstand, 15 minutes	70 kV	PASS
Partial Discharge (Corona) Voltage <3pC	13.0 kV	> 13.0 kV
Impulse withstand 1.2 x 50 μ s (crest kV)	110 kV	> 110 kV
AC withstand, 1 hour (60 hz)	52.5 kV	PASS
AC withstand, 5 hours (60 hz)	35 kV	PASS
Continuous current rating	= cable	= cable
Cyclical submersion test (ANSI C119.2)	Pass 52 cycles	Passed 52 cycles

BILL OF MATERIALS (Std. Pkg: 1 kit = 1 each, 3/C to 3-1/C joint)

Key	Item Description	Quantity	Supplied	Key	Item Description	Quantity	Supplied
①	Cable Breakout Boot	1 per kit	in all kits	⑤	Sealed Grounding Kit	3 per kit	Gmod (if spec'd)
②	Ground Jacketing Tube	3 per kit	in all kits	•	Cable cleaning kit	1 per kit	Pmod (if spec'd)
③	Core Jacketing Tube	3 per kit	in all kits	•	Butt-splice Connector*	1 per kit	Factory quoted
④	MVJ 150T series Kit Black Jacketing Tube	3 per kit	in all kits	•	Installation Guide	1 per kit	in all kits

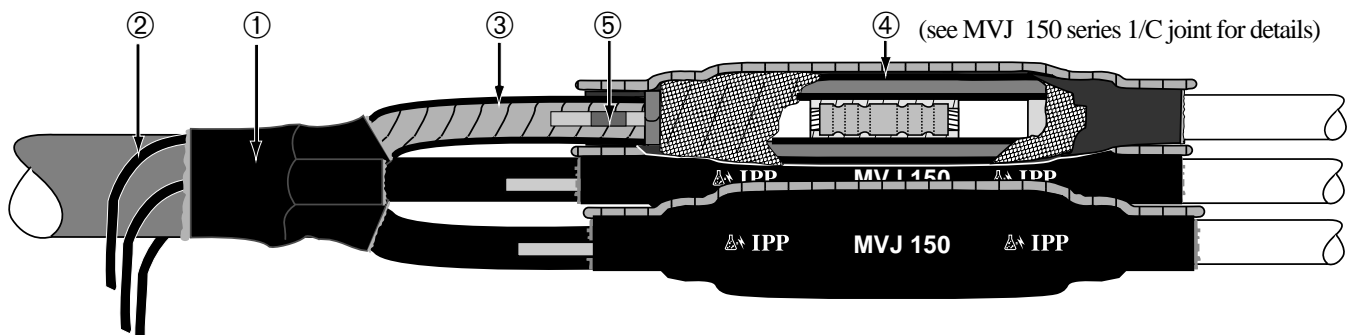

15 kV SELECTION GUIDE

Conductor Range	Kit Catalog Number	Insulation Diameter min.	Insulation Diameter max.	Connector Length max.	Connector O.D. max.	Installed Length min.	Installed Length max.
2-4/0 AWG	MVJT 151T	0.65	1.05	3.75	0.75	34.0	74.0
250-350 kcmil	MVJT 152T	0.90	1.30	5.00	1.00	40.0	78.0
500-750 kcmil*	MVJT 153T	1.10	1.60	6.00	1.35	46.0	85.0
750-1000 kcmil	MVJT 154T	1.30	1.85	8.00	1.85	48.0	88.0

* Copper connector only for 750 kcmil. Confirm dimensional data

ORDERING INFORMATION

- Find your cable size in the selection guide above and identify the kit catalog number. This kit will be all that is needed to splice one three-core cable to three single-core cables *less* the connectors and shield grounding kits. **Confirm dimensional data at extremes of size range.**

- Add the *mod kit* letter designation as needed to change the base kit :

G - solderless sealed grounding kit (Gmod)

P - cable cleaning kit including; solvent saturated towels and non-conductive abrasive cloth (Pmod).

* **CONNECTORS:** To have connectors supplied in the kits, please refer to Section 5 in this catalog for connector selection information. The connectors must be ordered separately but can be packaged within the kits if detailed information is supplied.

EXAMPLES:

For a 3/C (armored or unarmored), 15 kV, 2 AWG, cable spliced to a 3-1/C, 15 kV, 2 AWG, cables with a solderless grounding kit (G mod): **MVJT 151T G**

For a 3/C, 250 kcmil, copper conductor 15 kV cable spliced to 3-1/C, 350 kcmil, copper conductor, 15 kV cable with a cable cleaning kit: **MVJT 152T**