



SLK SERIES

STREET LIGHTING KIT

Rated to 1 kV

Description

Innovative Power Products SLK02 and SLK02Tx, street light kits are heat-shrinkable stub connection kits for electrically insulating, mechanically protecting and sealing stub connections for street light poles. The SLK02 kits cover a variety of conductor combinations and are rated to 1000 volts.


The SLK02T kits are designed for use with multi-conductor cables. The SLK02Tx kits have all of the components of the standard SLK 02 kit plus additional cable breakout boot(s), as required, to seal both the jackets and individual insulated conductors of the multi-conductor cables.

Heavy-walled, heatshrinkable materials ensure high quality insulated connections that will not unravel or fray. The SLK kits are a reliable method for insulating and sealing street light connections.

Kit Contents:

The SLK02 base kit contains everything needed to seal; and insulate the connections, less connectors:

- 4 each heavy-walled heatshrinkable caps
- 4 each black mastic sealant strips
- 1 each installation guide (1 per standard box)
- as req'd 4-leg cable breakout boots (for 4/C cables)

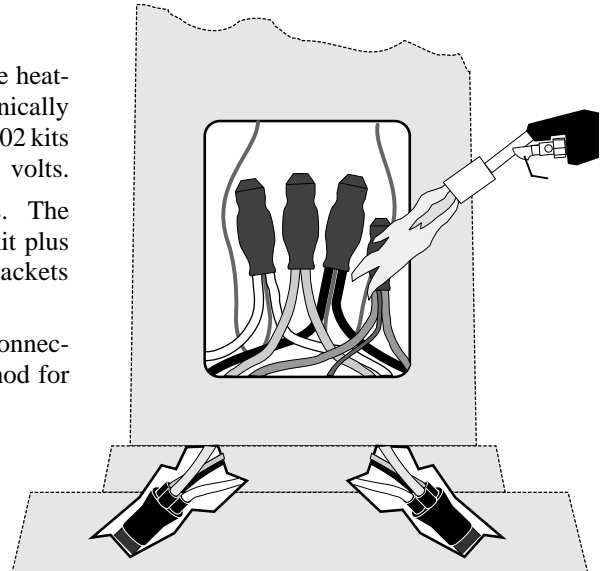

Related Product Information

SLK02 series:

- Price List PL-360

Selection and Ordering Information


For cable combinations rated to 1000 volts, confirm the cable size/combinations to select the proper kit.

Four, single-wire (1/C) runs with or without single wire (1/C) taps within the selection guide range, select the SLK02 kit.

Four, single-wire (1/C) runs with one, four-core cable tap, select the SLK02T1 kit that includes one cable breakout boot.

Two, four-core cable runs with or without single-wire (1/C) taps, select the SLK02T2 that includes two breakout boots.

Two, four-core cable (4/C) runs with one, four-core cable (4/C) wire taps, select the SLK02T3 that includes three breakout boots.

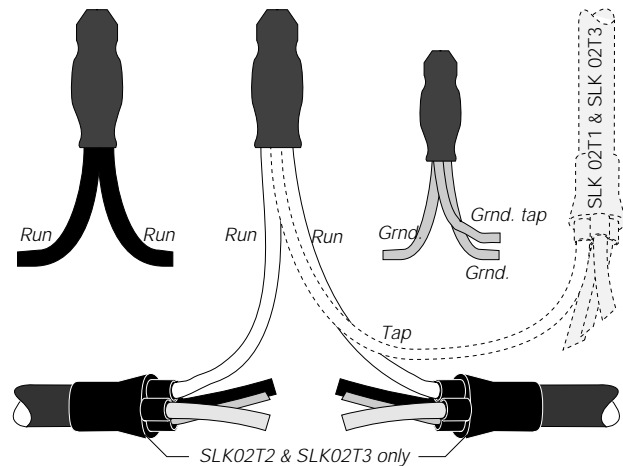

| Connection Wire Combination Description | 2 Runs Fig. 1 | 2 Runs+(tap) Fig. 2 | 3 Grounds Fig. 3 | Catalog Number |
|---|------------------|------------------------|---------------------|----------------|
| 4-1/C wire runs & 4-1/C taps (no boot) | #4-2 AWG | #4-2 AWG (#10-#4) | #6-4 AWG | SLK02 |
| 4-1/C runs & 1-4/C cable (= 4-1/C taps) (w/1 boot) | #4-2 AWG | #4-2 AWG (#10-#4) | #6-4 AWG | SLK02T1 |
| 2-4/C runs & 4-1/C taps (w/2 boots) | #4-2 AWG | #4-2 AWG (#10-#4) | #6-4 AWG | SLK02T2 |
| 2-4/C runs & 1-4/C cable (w/3 boots) | #4-2 AWG | #4-2 AWG (#10-#6) | #6-4 AWG | SLK02T3 |