



EJSK SERIES

Elbow/jacket Sealing Kit

Rated 1-35 kV

Description

The Innovative Power Products EJSK kit is a heatshrinkable sealing kit used to seal premolded elbows and other devices to jacketed power cable. The kit seals the device to the cable's jacket and mechanically reinforces the area. This added rigidity allows the operation of the elbows while reducing the amount of movement in the elbow/cable interface.

Fast, Easy Installation

Installation is fast and simple; no special skills are required.

- Install the external grounding kit (if -G)
- Apply sealant strips
- Center jacketing tube; shrink in place
- Connect braid to device ground eyelet

Versatility

The EJSK base kit includes everything necessary to seal jacketed power cables. Metallic tape, drain wire and UniShield® cables are all accommodated by the same kit.

Kit Contents (EJSK)


The EJSK base kit includes everything necessary to seal jacketed or unjacketed URD cables. Bare and jacketed concentric neutral cables are accommodated by the same kit.

Each EJSK kit contains:

- ① Heatshrinkable jacketing tube
 - ② Sealant strip
 - ④ Parallel crimp connector
- Installation guide

Installed EJSK 1G

Elbow-to-jacket sealing kit

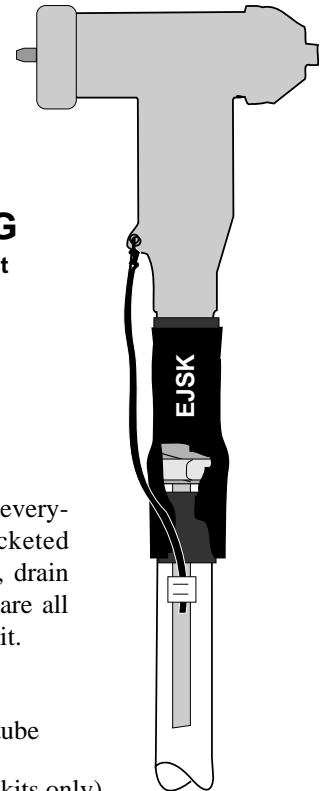

Kit Contents (EJSK xG)

The EJSK-xG kit includes everything necessary to seal jacketed power cables. Metallic tape, drain wire and UniShield® cables are all accommodated by the same kit.

Each EJSK xG kit contains:

- ① Heatshrinkable jacketing tube
 - ② Sealant strip
 - ③ Constant force spring (-G kits only)
 - ④ Parallel crimp connectors
 - ⑤ Solder-blocked tinned copper braid (-G kits only)
 - ⑥ Copper grounding wire (-G kits only)
- Installation guide

Related Product Information

EJSK, EJSK-G series:

• Price List PL-730

Selection and Ordering Information

Select the EJSK kit for the cable type, voltage class and conductor size of the cable. For metal tape, drain wire or UniShield® type cables, select the EJSK xG to have everything necessary to seal and reinforce the elbow-to-jacket interface.

Catalog No.	Sealing Sleeve Use Range	Conductor size (AWG/kcmil)				
		5 kV	8 kV	15 kV	25 kV	35 kV
Metallic Tape/Wire Shielded Cables						
EJSK-1G	0.75"-1.95"	#2-500	#2-350	#2-250	#1-3/0	-----
EJSK-2G	0.95"-2.75"	600-1000	400-1000	300-1000	4/0-1000	1/0-1000
Jacketed URD Cables						
EJSK-1	0.75"-1.95"	#2-500	#2-350	#2-250	#1-3/0	-----
EJSK-2	0.95"-2.75"	600-1000	400-1000	300-1000	4/0-1000	1/0-1000